




Calculation and construction are according to UNI 10023, ISO 5167, DIN 1952, BS 1042-1964, AFNOR NF X10-102.

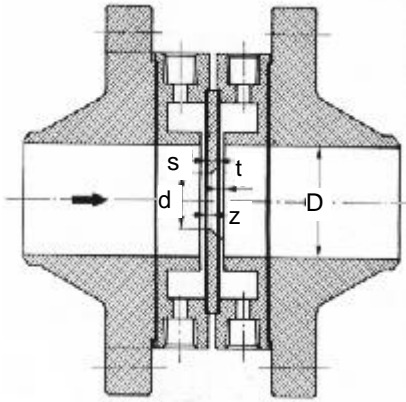


Execution with piezometric rings recommended up to 16" (DN 400) included

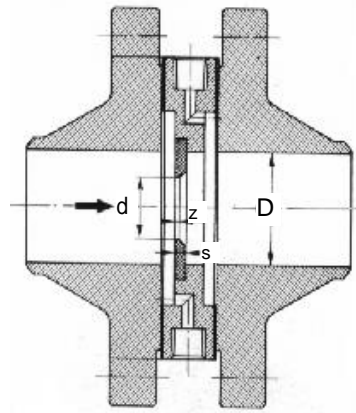

Execution with monolithic support

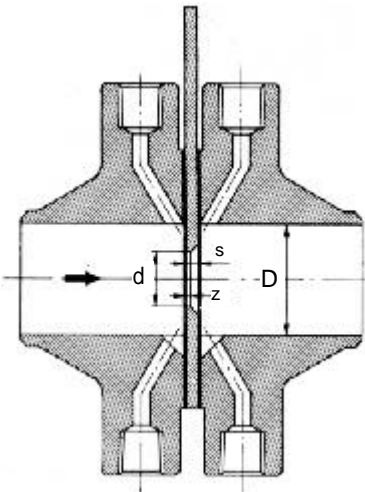

Execution corner taps type for 18" and larger.

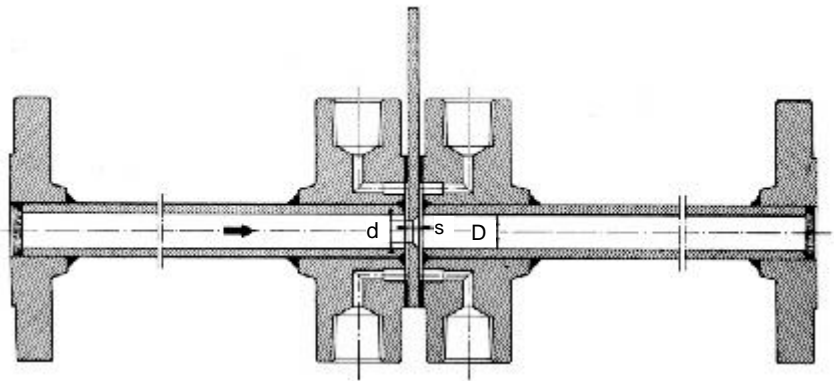

Execution with piezometric rings obtained directly in the flanges recommended for pipe sizes DN15 - DN20 - DN25 - DN32- DN40.