


Straightening vanes are installed in the upstream section of meter tubes to reduce flow turbulence their use often allows sufficient reduction of stream meter tube length.

Outside diameter of fluid straightening vanes for schedule 40 and schedule 80 thickness pipe.

<u>Line Size</u>	<u>Length of Vane</u> L in mm	<u>O.D. of Vane</u> A in mm	<u>Number of Tubes</u>
Ø2"	152	48,5	7
Ø3"	203	70	19
Ø4"	254	95	19
Ø6"	305	143	19
Ø8"	406	201	19
Ø10"	508	248	19
Ø12"	610	295	19
Ø14"	640	318	19
Ø16"	760	365	19
Ø18"	820	410	19
Ø20"	920	455	19

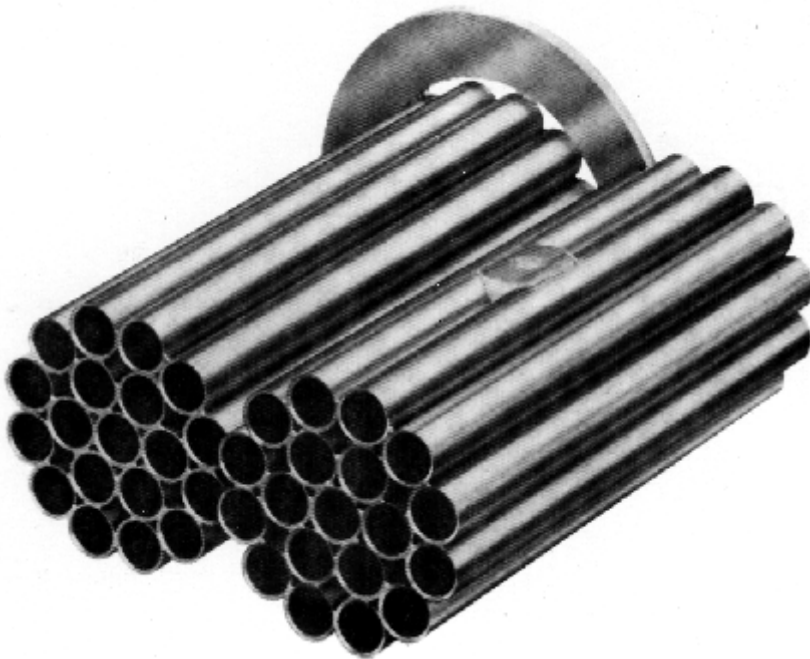

Straightening vanes flange model.