



Type **TOR A**

Magnetic level switch
Vertical mount
Wetted parts entirely AISI
Flange or thread connection
Up to six switching points

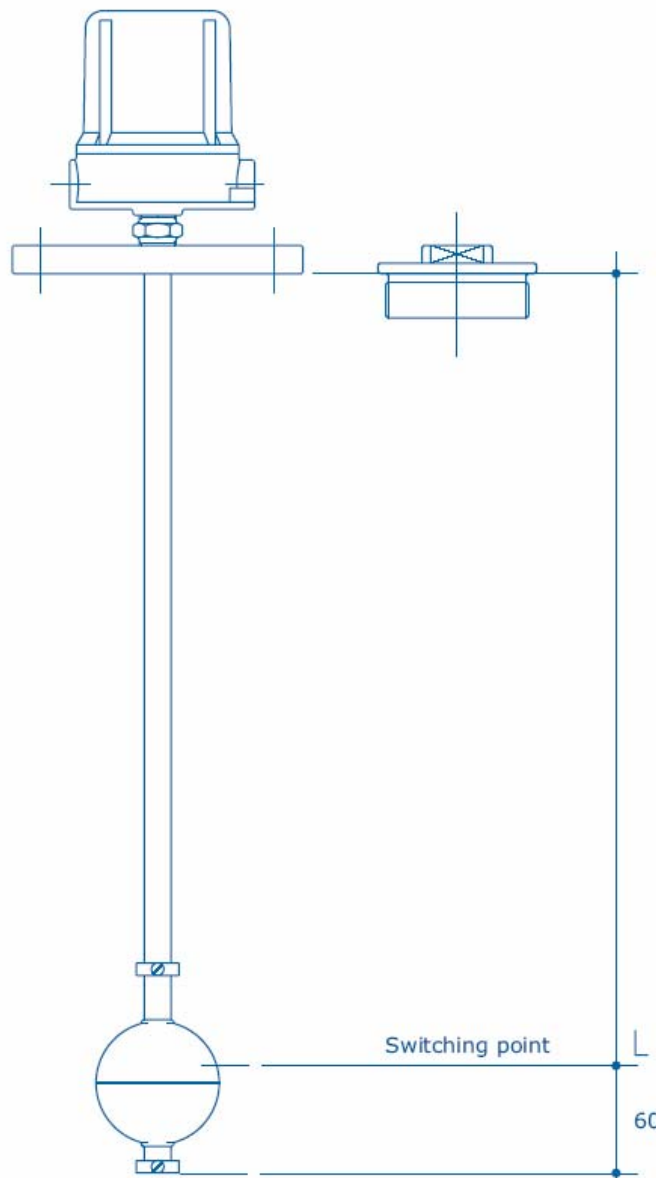

Type **TOR A**

FLANGE CONNECTION




U	UNI				
125	51	50	49	52	53
100	43	44	45	46	47
80	37	38	39	40	41
65	31	32	33	34	35
50	25	26	27	28	29
DN/PN	6	10	16	40	64

A	ANSI		
5	37	38	39
4	25	26	27
3	21	22	23
2½	17	18	19
2	29	30	31
DN/PN	150	300	600

Other sizes upon request

THREAD CONNECTION



F	Gas - M
1	07
1½	08
2	23
2½	29
3	26
4	30

F	Gas k-M
1	03
1½	04
2	22
2½	31
3	32
4	33

F	NPT-M
1	17
1½	18
2	29
2½	34
3	35
4	36

Other sizes upon request

FLANGE AND THREAD MATERIAL

1	CARBON STEEL	4	AISI 304	3	AISI 316 L
---	--------------	---	----------	---	------------

FLOAT SIZES

B	Ø 44	E	Ø 55	J	Ø 72	M	Ø 80	N	Ø 90	O	Ø 100
---	------	---	------	---	------	---	------	---	------	---	-------

Other diameters upon request, depending on applicable design pressure and fluid specific gravity

FLOAT MATERIAL

9	AISI 304	1	AISI 316 L	3	MONEL	4	HASTELLOY
---	----------	---	------------	---	-------	---	-----------

WORKING PARAMETERS

P	Pressure < 100 bar	T	Temperature - 110 + 200 °C	S	Fluid specific gravity > 0,6 kg/litre
---	-----------------------	---	-------------------------------	---	--