



Type **TOR B**

Magnetic level switch
Vertical mount
Wetted parts AISI, Float BUNA N
Flange or thread connection
Up to six switching points

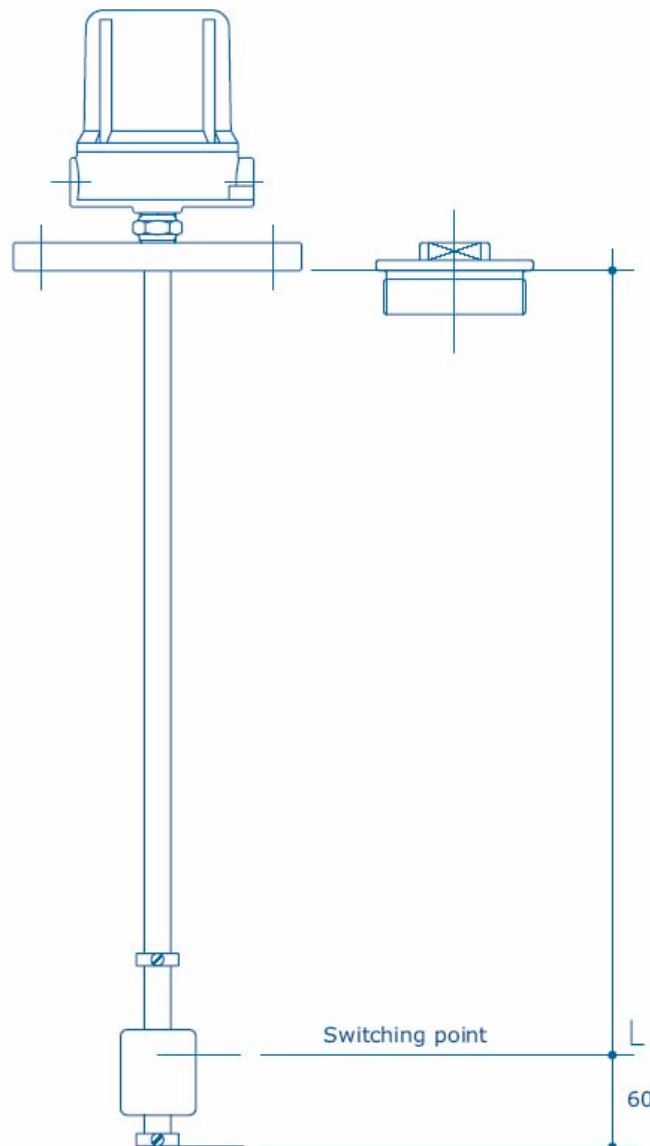

Type **TOR B**

FLANGE CONNECTION




U	UNI		
125	51	50	49
100	43	44	45
80	37	38	39
65	31	32	33
50	25	26	27
DN / PN	6	10	16

A	ANSI
5	37
4	25
3	21
2½	17
2	29
DN / PN	150

Other sizes upon request

THREAD CONNECTION



F	Gas - M
1	07
1½	08
2	23
2½	29
3	26
4	30

F	Gas k-M
1	03
1½	04
2	22
2½	31
3	32
4	33

F	NPT-M
1	17
1½	18
2	29
2½	34
3	35
4	36

Other sizes upon request

CONNECTION MATERIAL

1	CARBON STEEL	4	AISI 304	3	AISI 316 L
---	--------------	---	----------	---	------------

FLOAT SIZE

A	Ø 30	B	Ø 44	F	Ø 58
Other diameters upon request, depending on applicable design pressure and fluid specific gravity					

FLOAT MATERIAL

8	BUNA N
---	--------

WORKING PARAMETERS

P	Pressure < 16 bar	T	Temperature - 20 + 80 °C	S	Fluid specific gravity > 0,6 kg/liter
---	----------------------	---	-----------------------------	---	--