


# TUBULAR TYPE GLASS LEVEL GAUGES

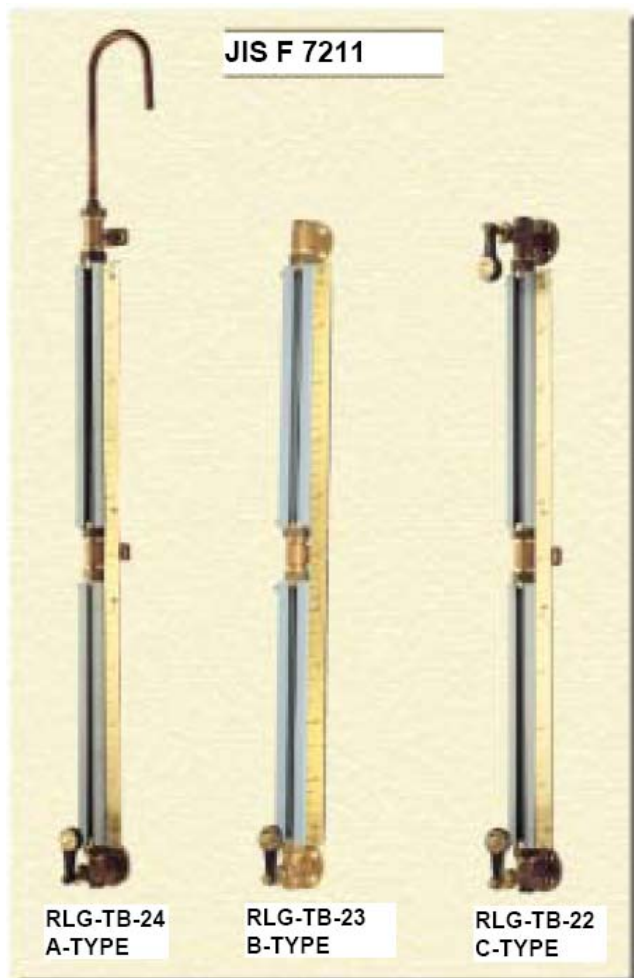

## MARINE GAUGE

Tubular type glass level gauges have been developed to comply with the requirement of SOLAS 1981, 1983, 1996, 1997, 1998 amendments.

## APPLICATION

These type level gauges are used for water tanks and for fuel oil tanks less than 1000 liter.

## LIMITATIONS

The tubular type glass level gauges. RLG-TB-12/13/14 can be used for the following conditions.

- fuel oil tank of which the capacity is less than 1000 liter.
- in ship with class notation "Coasting Service" or whose gross tonnage is less than 500 tons.

JIS Code	Model	Upper body type	Valve type		Connection size	Material			Protector type	Center to center
			Upper	Lower		Protector	Glass	Valve		
	RLG-TB-24	A-type	Vent	Shut-off	JIS, DIN, ANSI	SS41	HARD	BC6	K-type	325 ~ 3765 (mm)
JIS F 7211	RLG-TB-23	B-type	Tank return	Shut-off	JIS, DIN, ANSI					
	RLG-TB-22	C-type	Shut-off	Shut-off	JIS, DIN, ANSI					
	RLG-TB-14	A-type	Vent	Self-closing	JIS, DIN, ANSI					
JIS F 7212	RLG-TB-13	B-type	Tank return	Self-closing	JIS, DIN, ANSI					
	RLG-TB-12	C-type	Shut-off	Self-closing	JIS, DIN, ANSI					
Range of pressure 0-3 bar			Range of temperature 0-100°C							

- 1). The level gauges shall be classified into three types A.B.C. according to the shape of the upper body.
- 2). Please consult with our factory when other conditions are required.
- 3). The scale board is an optional item.